

SP-F711

缝合扒缝一体机
Overlock and seam machine



性能优势

将拷克与压缝(扒缝)合为一休，节省空间，降低成本。
一次完成缝压工艺，提高产品品质和工作效率。
可以一机多用，缝压和扒缝两种工艺。
机头可快速移动，维修方便。
人机界面方便操作。

Advantages

Integrate overlock and seam (gap seam) into one, save space and reduce cost.
The sewing process is completed at one time to improve product quality and work efficiency.
It can be used for multiple purposes in one machine, with two processes of overlock and seam.
The machine head can be moved quickly and the maintenance is convenient.
The man-machine interface is easy to operate.

效率

简单的操作方式，对操作者无需特别的技能要求。
进料、缝制、剪线、收料一次完成。
自动翻料，无需人工操作。
根据布料厚度，电机自动调节高度，宽度。

Efficiency



The simple operation method does not require special skills for the operator.
Feeding, sewing, thread trimming and receiving are completed at one time.
Automatic turning over without manual operation.
According to the thickness of the fabric, the motor automatically adjusts the height and width.

适用范围

适用于各类针织、梭织面料的合缝、压明线（扒中缝，扒中缝单边倒，压止口）。

Application

It is suitable for seaming and topstitching of all kinds of knitted and woven fabrics (removing the middle seam, pulling the middle seam and inverting one side, pressing the seam).

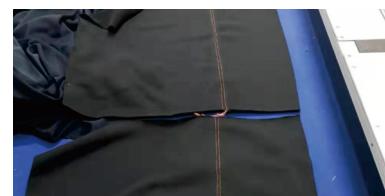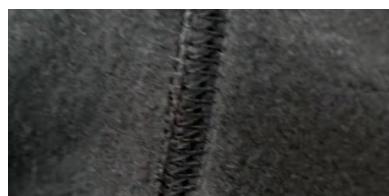

视频及资料下载
Video and data download

最高缝纫速度 Highest sewing speed	包缝3000rpm / 缝合4500rpm Overlock 3000rpm / interlock 4500rpm	气压 Air pressure	0.3L/min
电压 Voltage	220V (50Hz)	重量 Weight	300Kg
外型尺寸 Dimensions	1600×1090×1200mm(L*W*H)		

以上基础参数表为标准款机型