

SP-F121

扒缝机

Seam opening machine



性能优势

扒缝速度均匀、耐性强、效率高、效果美观；
设备占地面积小、可靠性强、磨损小、维修成本低。
代替人工扒缝，操作简单，根据工人熟练程度可对扒缝速度做相应的调整。

效率

可调节速度：0.2-0.35秒/件

内里衣缝制布料

辊轧分离或合拢

Performance advantage

The speed of the seam is uniform, the resistance is strong, the efficiency is high, and the effect is beautiful;
The equipment has a small area occupation, strong reliability, low wear and tear and low maintenance costs.
Instead of manual stitching, the operation is simple, and the stitching speed can be adjusted accordingly according to the proficiency of the workers.

Efficient

Adjustable speed: 0.2-0.35 seconds/piece

Sewing fabric for inner lining


Roll separation or closing

适用范围

用于内里衣缝制布料，针织缝纫行业的包缝棱骨拉平。

Scope of application

It is used for sewing fabrics for inner garments and flattening the overlock seam ribs in the knitting sewing industry.

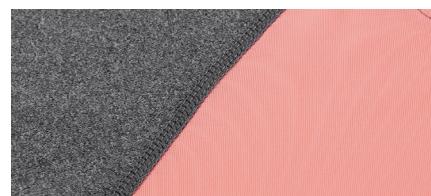

视频及资料下载
Video and data download

适用材质 Application	内里衣缝制布料 Sewing fabric for inner lining	气压 Air pressure	0.2Mpa
功能 Function	辊轧分离或合拢 Rolling to separate or close	重量 Weight	45Kg
工作方式 Way of working	电+气 Electricity + Air	外型尺寸 Dimensions	1000×545×1210mm(L×W×H)
启动方式 Start-off mode	脚踏 Pedal	电压 Voltage	单相Single phase220V

以上基础参数表为标准款机型