

客户体验

Customer experience



规格

Specification

型号 Model	 平缝 Flat Seam	 2倍摆梭 2-time shuttle hook	 缝纫面积 Sewing area	 针距 Needle Length	 切线装置 Cutting device	 扫线装置 Scavenging device	 最高缝纫速度 Highest sewing speed	 WIFI
SP-3020AS-HF/KM	★	★	300×200mm	0.05 - 12.7mm	★	★	3,000 rpm	★

型号Model	SP-3020AS-HF/KM
线迹Line	单针平缝Single-needle flat seam
最高缝纫速度Highest sewing speed	3,000 rpm
缝制区域(X×Y) Sewing area	300×200 mm
送布装置 Cloth feeding device	间歇送布 (脉冲马达驱动) Intermittent feeding (driven by pulse motor)
针距Stitch length	0.05 - 12.7mm
最大针数Max. needle number	20,000针/1个图案(20,000 needles/1 pattern)
压脚高度 Work Clamp Height	H/M/X:最大30 mm Maximum 30 mm
两步压脚2-step presser foot	一体式压脚 Integral press foot
间歇压脚上升量 Rising amount of intermittent foot presser	22 mm
间歇压脚行程 Stroke by intermittent presser foot	0或2 - 10 mm (出厂设置:3mm) 0 or 2 - 10 mm (Factory defaults:3mm)
旋梭Hook	两倍摆梭 Double Shuttle Hook
扫线装置 Thread Wiper	标准装备/Standard facility
切线装置 Cutting device	标准装备/Standard facility
数据存储方式Data storage way	USB
马达Motor	AC伺服马达550W /AC servomotor 550W
机器尺寸 Mechanical dimensions	1200×1200×1300
包装尺寸 Packing size	1300×1300×1400
重量Weight	240 kg
电源Power	单相Single phase 220V, 3相 3-phase 380V
气压Air pressure	0.5 Mpa 1.8 L/min
配置 Configuration	快速换模装置

以上型号仅供参考，详细情况请咨询当地经销商。
The above types are only for reference, and you can consult local distributors for details.

为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.

舒普智能技术股份有限公司
SUPREME INTELLIGENT TECHNOLOGY CO.,LTD

地址：宁波市鄞州区金谷北路219号
No. 219 North Jingu Rd. Yinzhou District, Ningbo
315100, China

TEL：0086-574-88393716 88393738
FAX: 0086-574-88393717
E-mail:china-supreme@vip.163.com

为时尚产业 提供智能制造解决方案

*Intelligent manufacturing
Solutions for fashion industries*

SP-3020AS-HF/KM

电子花样机（带WIFI功能）
Electronic Pattern Sewing Machine



SP系列电子花样机，高效美观的缝制效果，缝制范围更广，适用性更强，使用节能技术，机器更节能环保。适用于鞋类、箱包、服装等缝制。

SP series electronic pattern sewer, with the industry's fastest speed, efficient and beautiful sewing effect, wider sewing range, stronger applicability, using energy-saving technology, the machine is more energy saving and environmental protection.




SUPREME
创新 · 智造
Innovation & Creation

可程式中压脚

Tension sewing

在缝制高低段时，中压脚能随段部的变化而进行变更，即使面料厚度发生变化，也不会出现按压不到位或过度按压情况，防止损伤面料、断针断线等故障。

When sewing high and low sections, the middle pressure foot can be changed with the changes of the section. Even if the thickness of the fabric changes, there will not be insufficient pressure or excessive pressure, so as to prevent damage to the fabric, broken needle and thread and other faults.

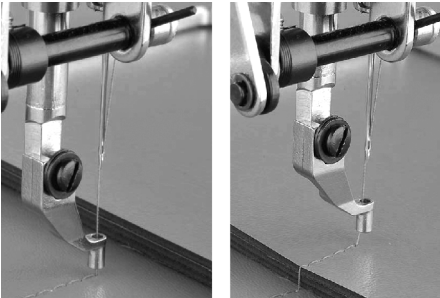

提高缝制品质

Improve sewing quality

X-Y马达闭环控制，可精准识别送布的位置，减少高速缝纫时偏差和厚重面料的缝制偏差。

X-Y motor closed-loop control can accurately identify the position of cloth feeding, reducing the deviation during high-speed sewing and the sewing deviation of heavy fabrics.

电子夹线器

Disconnection holding function

根据产品要求可变多段线张力调节,使缝制线迹更美观。

With Variable tension of multi segments ,electric tension device leaves less margin and provides better stitching trace.

无油式机头

Dry head

机头面部（针杆部、挑线杆部）通过润滑脂润滑，梭部通过油线微量供油，减少缝制品受到油污的污染。

The face of the machine head (needle rod part, wire rod part) is lubricated by grease, and the shuttle part is supplied with oil through oil line to reduce the pollution of sewn products by oil.

耗电低、高转速、高效能

Lower power consumption higher speed ,higher efficiency

采用无传动损失的电脑直接驱动式小型节能马达。耗电量与传统机型相比削减了50%，是市场上耗电最低的电脑花饰机。

Adopt computer direct drive small energy saving motor without transmission loss. Power consumption has been cut by 50% compared with traditional models, making it the lowest power consumption computer machine on the market.

花样编辑快速简便

Fast and convenient program editing

使用PD3000编程软件，可快速简便的编辑花样，AS款更可兼容DA/DE,PLK格式花样编辑，修改花样更简便大屏幕液晶操作界面，全新的触摸屏控制，只需手指轻触即可完成人机对话。根据图标和命令，轻松创建缝纫数据。

Using PD3000 programming software, it is easy to edit pattern, and AS is more compatible with DA/DE, PLK format pattern editing, which simplify the process of pattern editing. With large screen LCD interface and new touch screen control, you can complete the man-machine dialogue using finger. You can create and editing the data easily according to the icons and orders;




强化机针贯穿力

Strengthening machine needle penetration force

大功率直接驱动式马达使得机针贯穿力更强，起针和停针速度更快，3000rpm的转速进一步提升了生产效能。


Powerful direct drive motor makes the machine needle penetration force more forcerul. The speed of start and stop is faster. The speed 2800rpm improves the efficiency to a further extent.

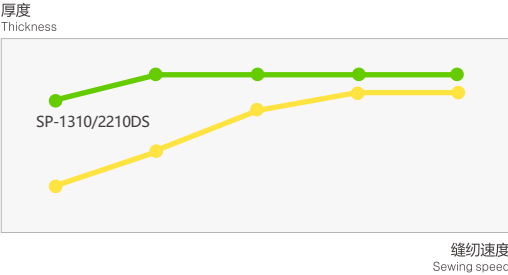

标配断线感应器

Standard broken-needle sensor

用于断线感应检测，在断线时将停止缝制并通知操作人员，减少不良品的发生。To be used for detection of thread broken .It automatically stops and informs the operator once it detects thread broken .

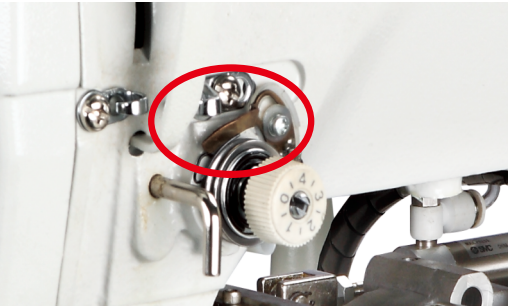

选购件

Optional

二次夹线装置
Secondary clamping device

通过触摸屏花样设置可实现多段张力调整，提高缝纫品质。
Can be used to detect broken thread .It automatically stops and informs the operator once it detected broken thread.



工业用扫码装置

Industrlal scanner

工业扫描枪可以直接把条形码的内容解码后通过数据线传输到电脑程序中。在缝制不同花式布料时，通过扫描条形码可快速选择相应的花样程序，方便快捷。

The machine can pick up correspondent patterns through scanning the barcodes.

