

放眼全球的 新质生产力解决方案

*New quality productivity solutions
with a global perspective*

SP799

高速环形筒式绷缝机

High speed circular cylinder Interlock machine

高效缝制 声音轻柔
数字调节 厚薄通吃
创新结构 一机多用
自研自产 媲美国际



- 最高缝纫速度: **5500**转/分钟
Maximum sewing speed **5500**rpm

- 抬压脚高度最高可达**10mm**
The maximum height of the lifting foot can reach **10mm**

- 剪线、抬压脚、松线、后拖轮一拖四控制
Cutting wires, lifting pressure feet, loosening wires, rear towing wheel,
controlled by one motor
- 抬压脚高度通过操作面板可实现一键调节
The height of the presser foot can be adjusted with one click
through the operation panel



SUPREME 舒普

— 助力时尚产业发展 —



高效缝制

最高等级绷缝机结构，融入舒普过硬技术底蕴，转速达5000转，效率提升20%！

The highest level of overlock sewing machine structure, integrated with SUPREME excellent technical expertise, with a speed of 5000 revolutions per minute and an efficiency increase of 20%.



声音轻柔

专利技术结构，步进电机控制剪线与抬压脚，速度快、声音轻、故障低、寿命长！

Patent technology structure, stepper motor control for wire cutting and pressure foot lifting, fast speed, light sound, low fault, long service life.



面板按键一键实现压脚高度数字化调节

切线刀行程参数化可调，抬压脚高度通过操作面板可实现一键调节，轻松、方便！

The tangent knife stroke is parameterized and adjustable, and the height of the lifting foot can be adjusted with one click through the operation panel, making it easy and convenient!

厚薄通吃

针杆行程可调，抬压脚高度最高可达10mm，从厚摇粒绒到薄弹性面料均能缝制！


The needle rod stroke is adjustable, and the height of the lifting foot can reach up to 10mm. It can sew from thick fleece to thin elastic fabrics.



全新外置步进专利结构

可同时实现剪线、抬压脚、松线以及后拖轮一拖四控制！

It can simultaneously achieve wire cutting, foot lifting, wire loosening, and one to four control of the rear towing wheel.

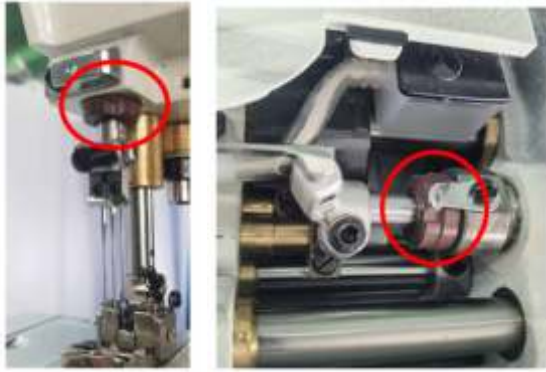

不漏油


针杆、下钩针杆采用顶级特殊结构装置，有效防漏、渗油，可高品质、清洁缝纫！

The needle bar and lower crochet hook bar are equipped with top-level special structural devices, which effectively prevent leakage and oil leakage, and can be used for high-quality and clean sewing.

上下主轴强制性给油

润滑更稳定，零部件更耐磨，故障率更低，使用寿命更长；

Lubrication is more stable, components are more wear-resistant, failure rate is lower, and service life is longer

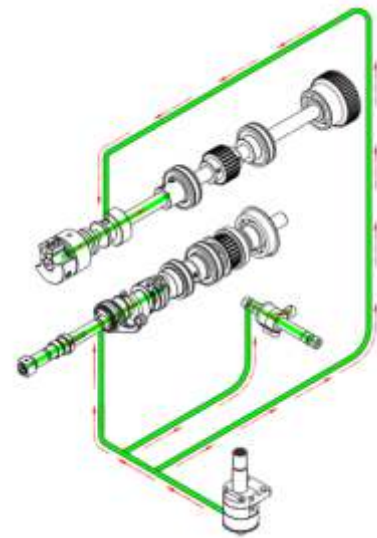

一机多用

Multi purpose machine



适应多种配件

精心设计，更换组件，可实现下摆、滚边、倒骨缝制，标配长定规，适应性更广；

Carefully designed and equipped with replacement components, it can achieve hem, edge rolling, and reverse stitching. It comes standard with long specifications and has a wider adaptability.



马扎克加工中心
Mazak Units



加工中心
Processing Center



数控加工中心
CNC machining center



大数据看板
Big data dashboard



三坐标测量仪
Coordinate Measuring Machine



激光切割机
Laser Cutting Machine



喷涂流水线
painting assembly line

建有研发机加工车间、机加工工厂、钣金加工工厂、喷涂工厂等，拥有马扎克加工中心、大型龙门加工中心、精密数控磨床、钣金激光切割设备、三坐标测量等200余台（套）。先进的加工设备，推行大数据精益生产管理，构建起完善的生产制造体系，实现全线产品的自研自造，有效提高了舒普产品和解决方案的性价比和竞争力。

A complete production and manufacturing system, with R&D machining workshops, machining factories, sheet metal processing factories, spray painting factories, etc., equipped with over 200 advanced processing equipment such as Mazak machining centers, large gantry machining centers, precision CNC grinders, sheet metal laser cutting equipment, and three coordinate measurement. We promote big data lean production management and achieve self research and self manufacturing of all products, Effectively improving the cost-effectiveness and competitiveness of SUPREME products and solutions.

I 机种型号说明: Description of machine model

SP799 — D

机型系列 Model series
高速环形筒式绷缝机
High speed circular cylinder interlock machine

机型系列 Model series
直驱绷缝机
Direct drive interlock machine

01 × 3

针数 Number of stitches

2	2stitches
3	3stitches
4	4stitches
5	5stitches

56 M

针距 Needle distance

NO.	mm	inch
32	3.2	1/8
40	4.0	5/32
48	4.8	3/16
56	5.6	7/32
64	6.4	1/4

车缝布料 Sewn fabric

L	薄料 Thin material
M	中厚料 Medium thick material
H	厚料 Heavy duty

UTFU

多功能辅助装置
Multi function auxiliary device

UTC	气动自动上下剪线和抬压脚装置 Pneumatic automatic upper and lower wire cutting and lifting foot device
UTA	气动自动下剪线和抬压脚加气动吹气装置 Pneumatic automatic wire cutting and lifting foot blowing device
UTFU	步进抬压脚和剪线加电动拨线装置 Step by step lifting foot and wire cutting with electric wire pulling device
UTFD	步进抬压脚和剪线加电动上剪线装置 Step by step lifting foot and wire cutting with electric wire cutting device
P	后拉拖轮(齿状滚轮) Rear tugboat (toothed roller)
RP	后拉拖轮(平状滚轮) Rear tugboat (flat roller)
FTL	左切刀修布装置 Left cutting knife cloth repairing device
FTR	右切刀修布装置 Right cutting knife cloth repairing device
MS	密缝装置 Sealing device
MMD	集成式电子送带装置 Integrated electronic conveyor belt device

用途 Purpose


01	基本缝 Plain seaming
03F	盖缝(立骨) Cover seam (standing bone)
03G	盖缝(倒骨) Cover seam (inverted bone)
05B	缝花边松紧带用 Sewing lace elastic band
33A	松紧带缝(右切刀) Sewing elastic band (right cutter)
35B	下摆缝用(左切刀) Sewing clothes hem (left cutter)
92	四针六线搭接缝 Four needle six thread lap joint



直驱绷缝机
Direct drive Interlock machine



UTC
气动自动上下剪线和抬压脚装置
Pneumatic automatic upper and lower wire cutting and lifting foot device

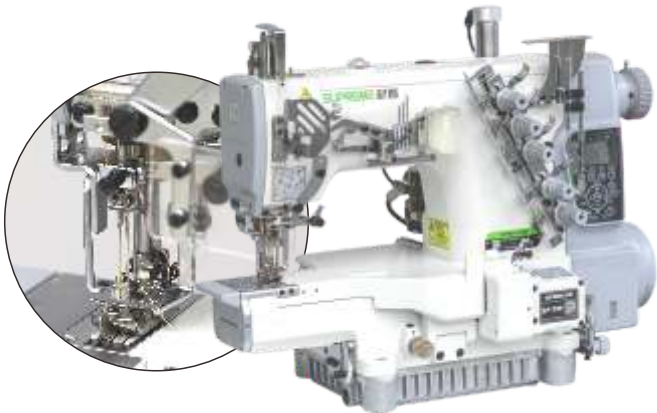

UTA
气动自动下剪线和抬压脚
加气动吹气装置
Pneumatic automatic wire cutting and lifting foot blowing device



UTFU

步进抬压脚和剪线
加电动拨线装置


Step by step lifting foot and wire cutting
with electric wire pulling device



UTFD

步进抬压脚和剪线
加电动上剪线装置

Step by step lifting foot and wire cutting
with electric wire cutting device

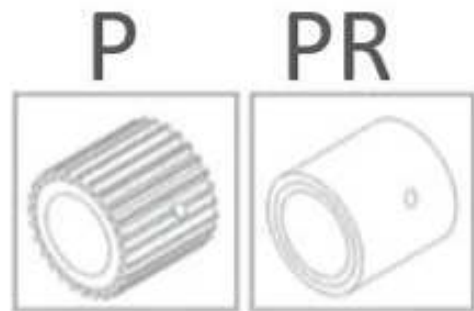

P 后拉拖轮(齿状滚轮) Rear tugboat (toothed roller)

RP 后拉拖轮(平状滚轮) Rear tugboat (flat roller)

应用实例 Use Case

广泛适用于针织、服装、文胸、内衣、内裤、T恤等面料的缝制，从厚厚的摇粒绒到薄薄的弹性面料均能出色缝纫。
Widely applicable for sewing fabrics such as knitwear, clothing, bras, underwear, underwear, T-shirts, etc., it can sew well from thick fleece to thin elastic fabrics.



规格 Specification

机型 Model	用途 Purpose	机针 Needle	针数 Number of stitches	线数 Number of lines	针间距 Needle spacing	针迹长度 Stitch length	差动比 Differential ratio	压脚高度 Presser foot height	最高转速 Maximum speed	体积 Volume	可搭配辅助装置 Matching accessories
SP799-01X356M	基本缝 Plain seaming	11#	3	5	5.6	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR
SP799-01X364M	基本缝 Plain seaming	11#	3	5	6.4	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR
SP799-03FX356M	盖缝(立骨)	11#	3	5	5.6	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR
SP799-03FX364M	盖缝(立骨)	11#	3	5	6.4	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR
SP799-03GX356M	盖缝(倒骨)	11#	3	5	5.6	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR
SP799-03GX364M	盖缝(倒骨)	11#	3	5	6.4	1.4-4.2	0.9-1.4	5.5-10	5500	675X440X650	UTFU,UTFD,UTC,UTA,P,PR

以上型号仅供参考，详细情况请咨询当地经销商。
The above types are only for reference, and you can consult local distributors for details.
为了改良，产品规格若有变更，恕不另行通知。为安全起见，使用之前，请仔细阅读使用手册。
Specifications are subject to change for improvement without further notice. Please carefully read the operating manual before use for safety.